

Product SPECIFICATION SHEET



TSSP 12-14, 18-8, 25-15, 30-20 Series

TSSP + Built-In Controller




TSSP + Supplied Controller



Scoop of supply: Pump Controller, Cable Connector, Cable for Solar Panels, Water Level Sensors, Solar Flash Light
 Compared with traditional AC motors the efficiency is increased by up to 25% by the use of permanent magnets, direct current, brushless, nonsensor motors.
 Ideal for areas where AC supply is non-existent or compromised by continuous outage. Can be used for the supply of drinking water, irrigation, clean water circulation / reticulation

Code	Volts (VDC)	Power	Max Flow	Max Head	I/O Size	Controller		Required PV Panels
						Built-In	Supplied	
TSSP-12-14-48/500	48	500W	12m ³ /h	14m	2" x 2"	Yes	—	170W x 4
TSSP18-8-96/750	96	750W	18m ³ /h	8m	3" x 3"	—	Yes	80W x 14
TSSP-25-15-110/1000	110	1000W	25m ³ /h	15m	3" x 3"	—	Yes	100W x 16
TSSP-25-15-110/1200	110	1200W	25m ³ /h	15m	3" x 3"	—	Yes	100W x 16
TSSP30-20-110/1500	110	1500W	30m ³ /h	20m	3" x 3"	—	Yes	100W x 16

Performance Curve

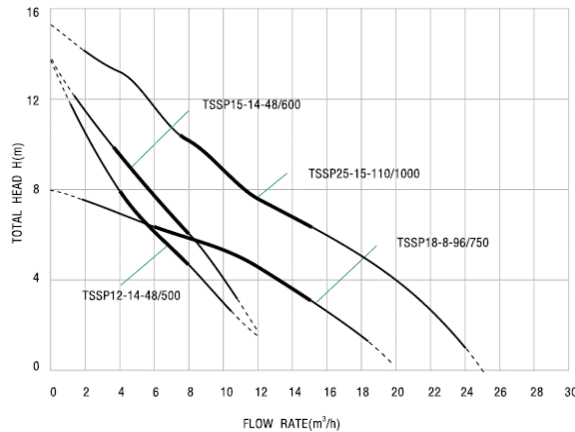

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
 Germiston 011 418 9600
 Cape Town 021 510 0710
 Pinetown 031 700 4215
 Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
 Technical 010 202 3500

www.acdc.co.za