

## PRODUCT INSTRUCTION

Product name: XDL19 Industrial Remote Control


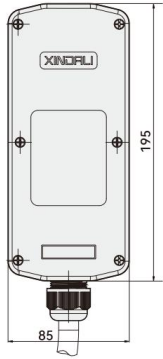

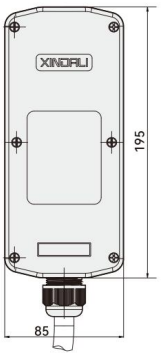

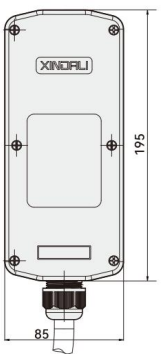
Model: see appendix







Picture: see appendix

|                          |                                                                  |
|--------------------------|------------------------------------------------------------------|
| Material of Housing      | Glass fiber reinforced nylon                                     |
| Controlling Distance     | Within 200M                                                      |
| Protection Level         | IP65                                                             |
| Controller Power         | 3.7V (2000mAh Battery)                                           |
| Receiver Rated Voltage   | AC36V、AC220V、AC380V, DC12V~24V                                   |
| Frequency Range          | 415~435MHz                                                       |
| Power of Signal Transmit | ≤10dBm                                                           |
| Receiver Sensitivity     | ≥-110dBm                                                         |
| Power Consumption        | < 5W                                                             |
| Cable Length/Size        | 1.2M (can be customized) /0.75mm <sup>2</sup>                    |
| Surrounding Temperature  | -35°C~+55°C                                                      |
| Air relative humidity    | < 90%RH                                                          |
| Air Pressure             | 86~106KPa                                                        |
| Controller Dimension     | 8 buttons (L158mm×W56mm×H47mm)<br>6 buttons (L138mm×W56mm×H47mm) |
| Receiver Dimension       | L195mm×W85mm×H62mm                                               |
| Weight                   | Controller: 180g, Receiver: 650~950g.                            |

# XINDALI Remote control receiver

- Small and elegant appearance
- Protection degree IP 65
- Clear outgoing line mark and wiring connection
- Easy installation with clear display of each function
- Indicator lights
- With various kinds of power supply signal, emergency stop,segment and power on.
- Embedded antenna with sensitive receiving.

| S. N O. | Model No.    | Product Image                                                                       | Dimension                                                                           | Dimension                                                                             |
|---------|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1       | XDL19-F21-4  |   |   |   |
| 2       | XDL19-XCD-DC |  |  |  |
| 3       | XDL19-F21-6  |  |  |  |

|   |                |                                                                                     |                                                                                     |                                                                                       |
|---|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 4 | XDL19-F21-8    |    |    |    |
| 5 | XDL19-F21-4-DC |    |    |    |
| 6 | XDL19-F21-6-DC |  |   |   |
| 7 | XDL19-F21-8-DC |  |  |  |