


Product SPECIFICATION SHEET

LED TRAFFIC R/G SET C/W HOUSING, 500x250x160mm 12VDC

XHD200-12*

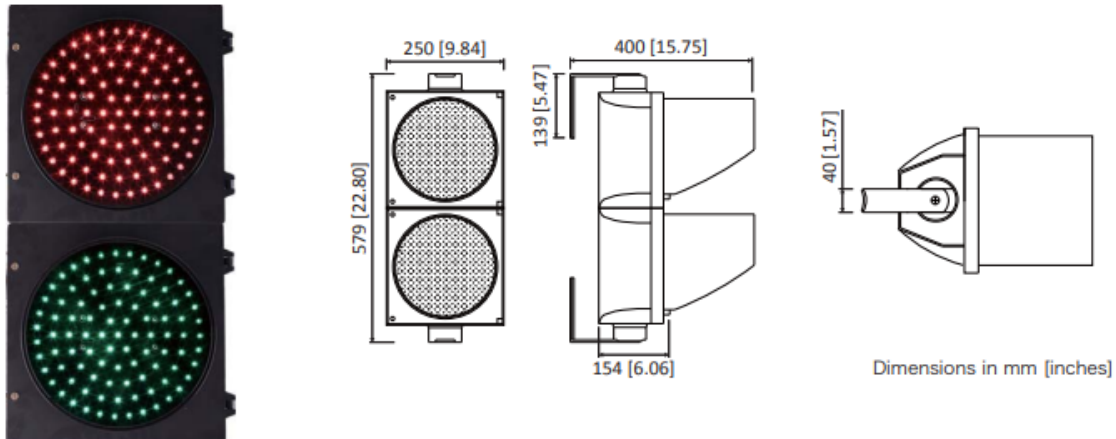

Characteristics

- Utilizing imported LED chip, long lifespan.
- Using constant current driver, working voltage 100-240VAC, or 12/24V DC, low power consumption
- Complete with visors, install brackets, screws. Using inflaming retarding and UV-proof housing material.
- Long visible distance, symmetrical light distribution.
- Multi-ply sealed water resistant,
- CE certified.
- Visible distance: >500M.
- Working humidity: ≤95%
- LED Driver: Constant current driver.

Main Technology Index

Model	Light Color	LED Qty	Light Intensity (mcd)	Wavelength (nm)	Visual Angle	Power Consumption (W)	Operating Temperature (°C)	Working voltage	Housing material	Dimension
XHD200-12	R	96	5000~7000	625±5	<30°	< 10W	-40~+75	100-240VAC 50/60Hz 12/24 V DC	PC	500 x250 x160 mm
	G	96	8000~13000	500±5		< 10W				

Product Packing

Model	Qty	Packing Dimension	Gross Weight	Fixture Weight (unit)	Packing material	Packing Volume
XHD200-12	1	555 x275 x245 mm	7.0 kg	5.6 kg	polybag, carton	0.039 m³

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za