

Product SPECIFICATION SHEET



ZM2CS & ZM4CS

Data sheet : Relay-Base model ZM2CS / ZM4CS


Printed Circuit Board socket for use with D Series miniature relays with 2 o 4 changeover contacts (model D2N & D4N). Ideally suited for any kind of sophisticated PCB application requiring 'plug-in' serviceability or maintenance.

SPECIFICATION



Rating :	10A 250VAC
Insulating resistance :	$\geq 1000 \text{ M}\Omega$
Dielectric strength :	$\geq 2 \text{ KV}$
Connections material :	silver plated bronze
Body plastic :	self-extinguishing PPEm
UL94 Rating :	V1
Approvals:	IMQ

Available Types :

ZM2CS (for use with D2 relay)

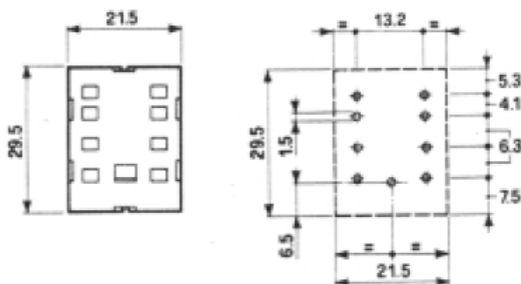

ZM4CS (for use with D4 relay)

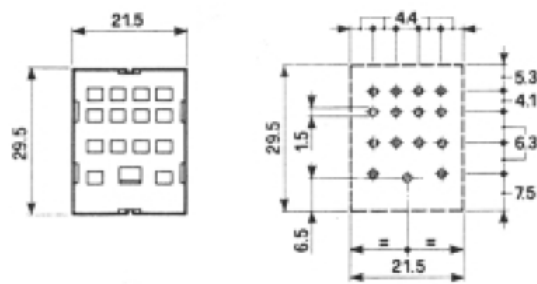

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za