

ZQS

Relay Sockets SPECIFICATION SHEET

ZOQS, ZUQS



RELAY SOCKET

TECHNICAL SPECIFICATIONS

Rated Current / Voltage	10A / 300VAC
Dielectric Strength	Coil: 2000V/S
	Between Contacts: 2000V/S

ZOQS Matched Relays

RELAYS

MK2P / MK2PK

JQX10-2Z

60.2 / 70.2

AS80.2 AS2P-U

TIME RELAY

ZUQS Matched Relays

RELAYS

MK3P / MK3PK


JQX10-3Z

60.3 / 70.3


AS80.3 AS3P-U

TIME RELAY

ZOQS Outline Dimensions

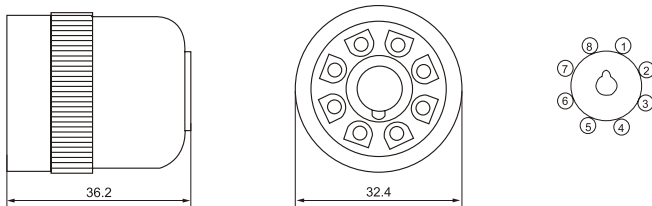

ZUQS Outline Dimensions

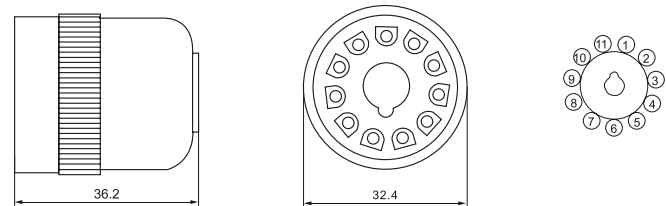

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

Contact Us
Today!



NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za