

Product SPECIFICATION SHEET

ATMS1601



Function

Program timer, can set 100 On/Off programs one day or per week.
Count down time, from 1 Min to 23 hours 59 Mins.
If the product is disconnected from the network, the timer retains all programs set up by Mobile App and works according to the set programs.
With memory function, When the product contact is in the close state, after the power failure, and then call, the product contacts still keep the close state.
Also can controlled by buttons from terminal A1 and A2.
Can be share with 100 persons by Mobile App.



Technical data

| | | |
|--|---------------------------------------|--------|
| Voltage rating | AC110-240V 50/60Hz | |
| Voltage limit | AC 100V~250V | |
| On/off operation | 100 On/ Off programs | |
| Power consumption | 5VA(max) | |
| Minimum interval | 1 Minute | |
| Count down | 1 min to 24 Hours | |
| Width | 1 Modules(18mm) | |
| Installation Type | Din Rail | |
| Switching contact | 1 NO(SPST) | |
| Switching Contact at 250VAC, cosφ=1 | 16A | |
| Switching capacity at 250VAC, cosφ=0.6 | 10A | |
| Incandescent/HALogen lamp load | 2300W | |
| Energy saving lamps | 22x7W, 18x11W, 16x15W, 16x20W, 14x23W | |
| Service life | Mechanically | 10^7 |
| | electrically | 10^5 |
| Ambient humidity | 35~85%rh | |
| Ambient temperature | -10~+40 °C | |
| Weight | approx100g | |
| Certificate | CE | |

If the product is disconnected from the network, the timer retains all programs set up by Mobile App and works according to the set programs. With memory function, When the product contact is in the close state, after the power failure, and then call, the product contacts still keep the close state. Also can controlled by buttons from terminal A1 and A2. Can be share with 100 persons by Mobile App.

BRANCH CONTACT DETAILS
Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800



NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za

Product SPECIFICATION SHEET



ATMS1601

Apps

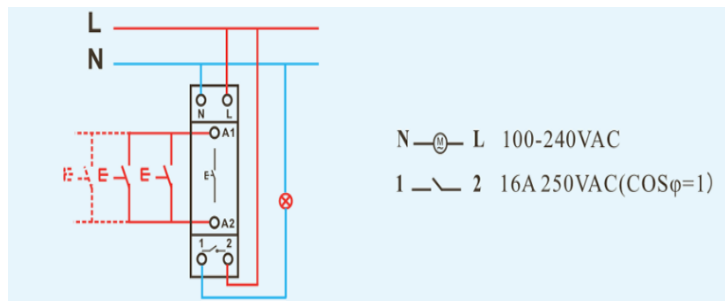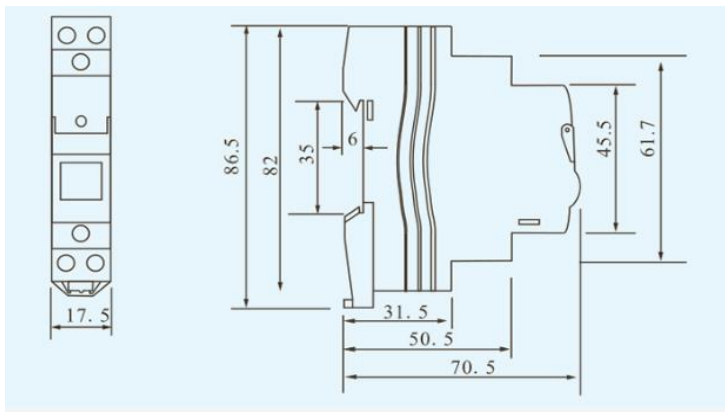

BRANCH CONTACT DETAILS
 Johannesburg 010 202 3300
 Germiston 011 418 9600
 Cape Town 021 510 0710
 Pinetown 031 700 4215
 Riverhorse 031 492 4800

NATIONAL CALL CENTRE
 Sales 010 202 3400
 Technical 010 202 3500
www.acdc.co.za