


Morsettiere di ripartizione Distribution terminal posts




Articolo Item	BD10074	BD125114	BD125154	
Corrente nominale Rated current	125A	125A	125A	
Numero poli Poles number	4	4	4	
Certificazioni Approval				
	A: 45 mm B: 72 mm C: 98 mm	A: 45 mm B: 109 mm C: 98 mm	A: 45 mm B: 138 mm C: 98 mm	
Fori per barra Holes each bar	7 fori - holes (1x Ø 9 - 1x Ø 8 - 5x Ø 6)	11 fori - holes (1x Ø 9 - 2x Ø 8 - 2x Ø 7 - 6x Ø 6)	15 fori - holes (1x Ø 9 - 2x Ø 8 - 2x Ø 7 - 10x Ø 6)	
Massima sezione per barra* Max cross section each bar*	1x35mm ² - 1x25mm ² 5x10mm ²	1x35mm ² - 2x25mm ² 2x16mm ² - 6x10mm ²	1x35mm ² - 2x25mm ² 2x16mm ² - 10x10mm ²	
Potenza dissipata per barra Dissipated power for bar	25°C	1.36 W	4.10 W	5.27 W
	85°C	1.46 W	4.85 W	6.30 W
I_{pk}	kA	20	22	22
I_{cw}	kA	6	6	6
U_{imp}	kV	8	8	8
Barretta per polo aggiuntivo Bar for additional pole				
	507N	5011N	5015N	
Numero e dimensione fori Holes number and dimensions	7 fori - holes (2x Ø 6 - 5x Ø 5,3)	11 fori - holes (2x Ø 6 - 9x Ø 5,3)	15 fori - holes (2x Ø 6 - 13x Ø 5,3)	

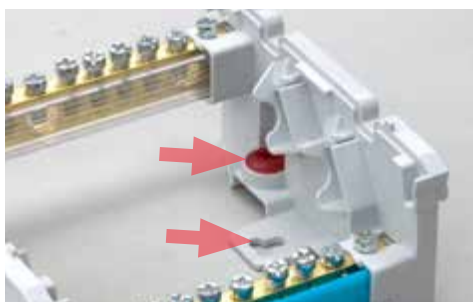

Le **NUOVE** morsettiere BOXDIN possono essere fissate su guida DIN con la vite rossa eccentrica oppure, usando le asole, possono essere fissate anche con viti

The NEW terminal post BOXDIN can be fixed on DIN rail with the eccentric red screw or, using the internal feet, can be fixed also with screws

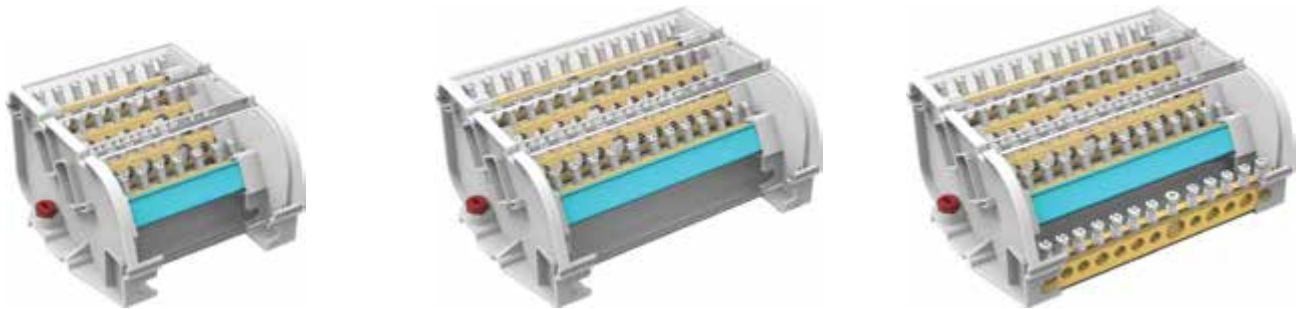

BD16084	BD160134	BD160135
160A	160A	160A
4	4	5
A: 70 mm B: 133 mm C: 136 mm	A: 70 mm B: 186 mm C: 136 mm	A: 70 mm B: 186 mm C: 136 mm
8 fori - holes (1x Ø 12 - 1x Ø 9 - 1x Ø 8 - 5x Ø 7)	13 fori - holes (1x Ø 12 - 2x Ø 9 - 2x Ø 8 - 8x Ø 7)	13 fori - holes (1x Ø 12 - 2x Ø 9 - 2x Ø 8 - 8x Ø 7)
1x50mm ² - 1x35mm ² 1x25mm ² - 5x16mm ²	1x50mm ² - 2x35mm ² 2x25mm ² - 8x16mm ²	1x50mm ² - 2x35mm ² 2x25mm ² - 8x16mm ²
2.82 W	4.39 W	4.39 W
3.17 W	4.93 W	4.93 W
24	24	24
10	10	10
8	8	8
BD1608	BD16013	
8 fori - holes (1x Ø 12 - 1x Ø 9 - 1x Ø 8 - 5x Ø 7)	13 fori - holes (1x Ø 12 - 2x Ø 9 - 2x Ø 8 - 8x Ø 7)	



Le barre centrali sono estraibili per un cablaggio più rapido e pratico

The central bars are removable for an easier wiring