ORBIS energia inteligente

Product SPECIFICATION SHEET

ACDC DYNAMICS www.acdc.co.za

MINI T

FIG.1

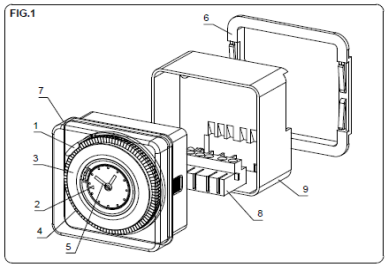


FIG.2

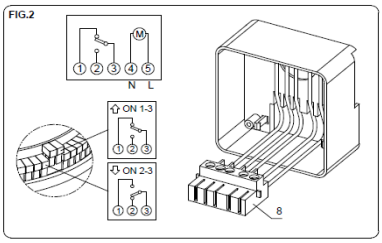


FIG.2

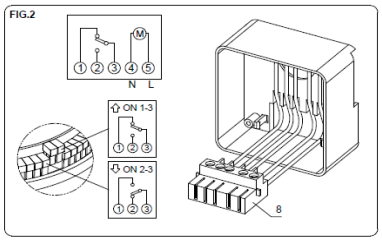


FIG.4





FIG.5



INSTRUCTIONS ON USE

FIG. 1

1.- Manual switch
2.- Index
3.- Dial
4.- Pins
5.- Clock hands
6.- Flush mounting accessory
7.- Transparent cover
8.- Removable terminal block
9.- Connection base

DESCRIPTION

Analogue time switch with daily and weekly programming. Plug in screw terminal base, or "fast on" terminals. For the timed control of electrical equipment and systems.

ASSEMBLING

Automatic control, independent mounting of wall mounting or 35mm rail in accordance DIN EN 60715.

CONNECTION

According to the **FIG.2** connection scheme.

PROGRAMMING

Shift all the pins upwards and shift downwards the corresponding pins to the desired connection times, in which the 2-3 contact will stay closed.

SETTING

Turn the dial clockwise so that it meets with real time. The clock hands must meet with real time.

MANUAL SWITCH

3 positions:

I - permanently on (2-3 closed)
⏲ - automatic operating
O - permanently off (2-3 open)

TECHNICAL CHARACTERISTICS

Supply:	According with nameplate
Switching capacity:	16 (4) A / 250 V~
Recommended maximum loads: see **FIG.4**.	
Own consumption:	1,8VA
Type of action:	1 BSTU in accordance EN 60730-2-7
Accuracy:	± 1 s/day at 23°C
Type of dial:	Daily: 96 pins Weekly: 84 pins
Minimum switching time:	D/QRD: 15 minutes QRS: 2 hours
Operating mode:	step by step motor
Operating temperature:	-10ºC to +45ºC
Contact:	AgCdO One pole changeover
Battery reserve:	Type D: without reserve Type QRD and QRS: 100 hours after uninterrupted supply of 48 hours.

This unit incorporates, in models with reserve, a battery which contents can be harmful to the environment. Please do not throw it away without removing the battery and putting it in the proper container for recycled or to send the complete unit back to the factory.

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za