
OKD and TMK – OK enclosure with inner modular frame



TMK

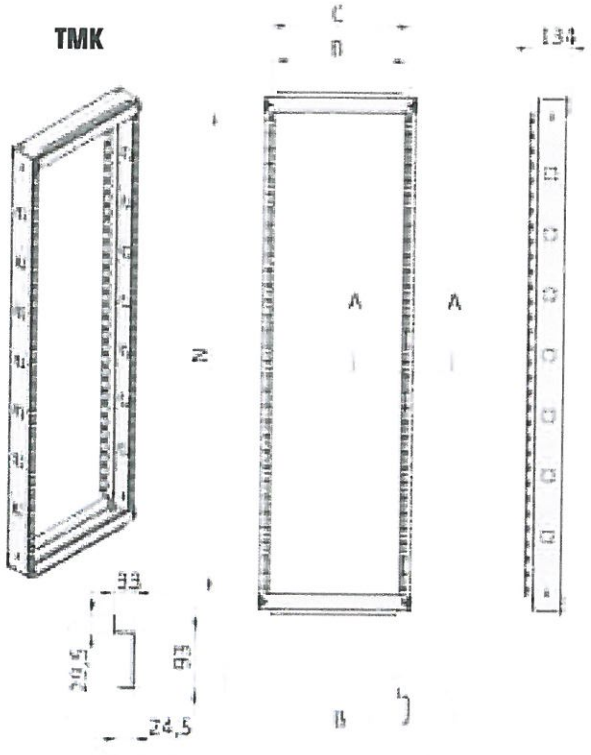

DETAIL B SECTION A-A

CODE	Nominal dimensions			CODE Frame	Other dimensions		
	H	W	D		B	C	N
OKD1664	1600	600	400	TMK166	445	465	1400
OKD1665	1600	600	500	TMK166	445	465	1400
OKD1666	1600	600	600	TMK166	445	465	1400
OKD1684	1600	800	400	TMK168	645	665	1400
OKD1685	1600	800	500	TMK168	645	665	1400
OKD1686	1600	800	600	TMK168	645	665	1400
OKD1864	1800	600	400	TMK186	445	465	1600
OKD1865	1800	600	500	TMK186	445	465	1600
OKD1866	1800	600	600	TMK186	445	465	1600
OKD1868	1800	600	800	TMK186	445	465	1600
OKD1884	1800	800	400	TMK188	645	665	1600
OKD1885	1800	800	500	TMK188	645	665	1600
OKD1886	1800	800	600	TMK188	645	665	1600
OKD2064	2000	600	400	TMK206	445	465	1800
OKD2065	2000	600	500	TMK206	445	465	1800
OKD2066	2000	600	600	TMK206	445	465	1800
OKD2068	2000	600	800	TMK206	445	465	1800
OKD2084	2000	800	400	TMK208	645	665	1800
OKD2085	2000	800	500	TMK208	645	665	1800
OKD2086	2000	800	600	TMK208	645	665	1800
OKD2088	2000	800	800	TMK208	645	665	1800
OKD2266	2200	600	600	TMK226	445	465	2000
OKD2286	2200	800	600	TMK228	645	665	2000

OKD

TMK

TMK - Description: it consists of 2 vertical uprights and 2 horizontal rails. The arrangement of modular covers and adjustable modular plates is completely customisable. In order to fill the N space (which is the total space between the 2 necessary compensation panels, to be ordered separately) it is possible to install any modular cover, hinged (right and left) or screwed.
The inner modular frame is ready for the fixing on its back section of the adjustable modular plates, and is embedded with several cut outs for the outgoing and incoming cables.

Guide to the modular covers arrangement:
In the table above all vertical enclosures' height is shown indicating the N dimension, which is the space available to be filled with the modular covers. The arrangements of modular covers are multiple.

Example: for an enclosure H=1800, the N dimension is 1600, which -for example- can be filled with 8 covers H=200, as well as with 4 covers H=200 and 2 cover H=400 etc.