

# PUMPS

## SPECIFICATION SHEET

4SP2/3





**4" STAINLESS  
STEEL DEEP WELL  
SUBMERSIBLE  
PUMPS**

### Characteristics

- Pumps have Radial or Semi-axial impellers and plastic (Noryl) impellers.
- Bearings are Ceramic/Rubber wet lubricated (water)
- Non return valve incorporated into pump body
- 230V Pump c/w Motor, Lead-out Cables Control Box
- 400V Pump c/w Motor, Lead-out Cables
- For bore hole diameter 100mm

| Pump Only | Pump & Motor |          | Power |      | Q - H<br>m <sup>3</sup> /h - m | Outlet | Length<br>mm |
|-----------|--------------|----------|-------|------|--------------------------------|--------|--------------|
|           | 230V         | 400V     | KW    | HP   |                                |        |              |
| 4SP2/9    | 4SP2/9P      | -        | 0,37  | 0,5  | 2.0 - 38                       | 1¼"    | 666          |
| 4SP2/13   | 4SP2/13P     | 4SP2/13V | 0,55  | 0,75 | 2.0 - 55                       |        | 770          |
| 4SP2/18   | 4SP2/18P     | 4SP2/18V | 0,75  | 1,0  | 2.0 - 76                       |        | 895          |
| 4SP2/23   | 4SP2/23P     | 4SP2/23V | 1,1   | 1,5  | 2.0 - 97                       |        | 1045         |
| 4SP2/33   | 4SP2/33P     | 4SP2/33V | 1,5   | 2,0  | 2.0 - 140                      |        | 1300         |
| 4SP2/48   | 4SP2/48P     | 4SP2/48V | 2,2   | 3,0  | 2.0 - 204                      |        | 1722         |
| 4SP3/9    | 4SP3/9P      | 4SP3/9V  | 0,55  | 0,75 | 3.0 - 41                       | 1¼"    | 686          |
| 4SP3/12   | 4SP3/12P     | 4SP3/12V | 0,75  | 1,0  | 3.0 - 55                       |        | 769          |
| 4SP3/15   | 4SP3/15P     | 4SP3/15V | 1,1   | 1,5  | 3.0 - 69                       |        | 877          |
| 4SP3/22   | 4SP3/22P     | 4SP3/22V | 1,5   | 2,0  | 3.0 - 110                      |        | 1069         |
| 4SP3/29   | 4SP3/29P     | 4SP3/29V | 2,2   | 3,0  | 3.0 - 132                      |        | 1340         |
| 4SP3/33   | 4SP3/33P     | 4SP3/33V | 2,2   | 3,0  | 3.0 - 153                      |        | 1386         |
| 4SP3/39   | -            | 4SP3/39V | 3,0   | 4,0  | 3.0 - 180                      |        | 1533         |
| 4SP3/45   | -            | 4SP3/45V | 3,0   | 4,0  | 3.0 - 203                      |        | 1683         |
| 4SP3/52   | -            | 4SP3/52V | 4,0   | 5,5  | 3.0 - 240                      |        | 1870         |

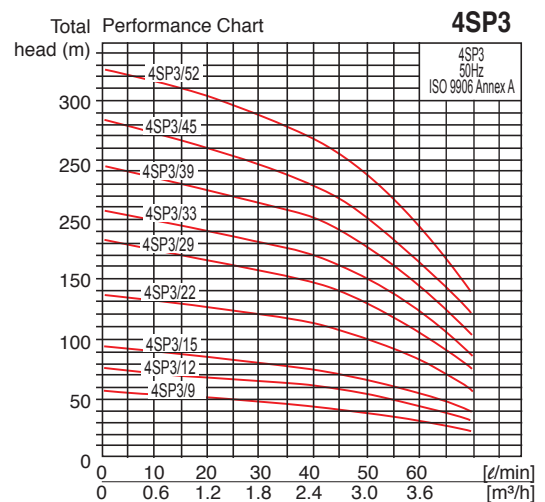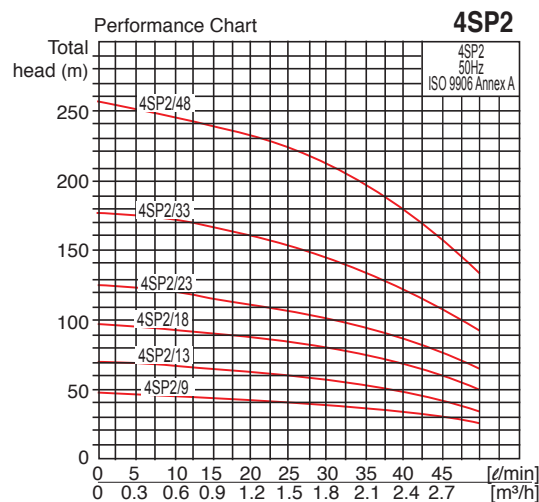

### BRANCH CONTACT DETAILS

|               |              |
|---------------|--------------|
| Johannesburg: | 010 202 3300 |
| Cape Town:    | 021 510 0710 |
| Pinetown:     | 031 700 4215 |
| Germiston:    | 011 418 9600 |
| Riverhorse:   | 031 492 4800 |



<http://www.acdc.co.za>

### NATIONAL CALL CENTRE

|           |              |
|-----------|--------------|
| Sales     | 010 202 3400 |
| Technical | 010 202 3500 |

[www.acdc.co.za](http://www.acdc.co.za)

# PUMPS

## SPECIFICATION SHEET

### 4SP5/8





**4" STAINLESS  
STEEL DEEP WELL  
SUBMERSIBLE  
PUMPS**

### Characteristics

- Pumps have Radial or Semi-axial impellers and plastic (Noryl) impellers.
- Bearings are Ceramic/Rubber wet lubricated (water)
- Non return valve incorporated into pump body
- 230V Pump c/w Motor, Lead-out Cables Control Box
- 400V Pump c/w Motor, Lead-out Cables
- For bore hole diameter 100mm

| Pump Only | Pump & Motor |          | Power |     | Q - H<br>m <sup>3</sup> /h - m | Outlet | Length<br>mm |
|-----------|--------------|----------|-------|-----|--------------------------------|--------|--------------|
|           | 230V         | 400V     | KW    | HP  |                                |        |              |
| 4SP5/8    | 4SP5/8P      | 4SP5/8V  | 0,8   | 1,0 | 5.0 - 32                       | 1½"    | 686          |
| 4SP5/12   | 4SP5/12P     | 4SP5/12V | 1,1   | 1,5 | 5.0 - 48                       |        | 814          |
| 4SP5/17   | 4SP5/17P     | 4SP5/17V | 1,5   | 2,0 | 5.0 - 67                       |        | 964          |
| 4SP5/21   | 4SP5/21P     | 4SP5/21V | 2,2   | 3,0 | 5.0 - 82                       |        | 1176         |
| 4SP5/25   | 4SP5/25P     | 4SP5/25V | 2,2   | 3,0 | 5.0 - 100                      |        | 1239         |
| 4SP5/33   | -            | 4SP5/33V | 3,0   | 4,0 | 5.0 - 130                      |        | 1407         |
| 4SP5/38   | -            | 4SP5/38V | 4,0   | 5,5 | 5.0 - 151                      |        | 1594         |
| 4SP5/44   | -            | 4SP5/44V | 4,0   | 5,5 | 5.0 - 174                      |        | 1720         |
| 4SP8/5    | 4SP8/5P      | 4SP8/5V  | 0,8   | 1,0 | 8.0 - 20                       | 2"     | 631          |
| 4SP8/7    | 4SP8/7P      | 4SP7/7V  | 1,1   | 1,5 | 8.0 - 28                       |        | 731          |
| 4SP8/10   | 4SP8/10P     | 4SP7/10V | 1,5   | 2,0 | 8.0 - 40                       |        | 858          |
| 4SP8/12   | 4SP8/12P     | 4SP7/12V | 2,2   | 3,0 | 8.0 - 48                       |        | 1062         |
| 4SP8/15   | 4SP8/15P     | 4SP7/15V | 2,2   | 3,0 | 8.0 - 60                       |        | 1075         |
| 4SP8/18   | 4SP8/18P     | 4SP7/18V | 3,0   | 4,0 | 8.0 - 71                       |        | 1185         |
| 4SP8/21   | 4SP8/21P     | 4SP7/21V | 4,0   | 5,5 | 8.0 - 82                       |        | 1332         |
| 4SP8/25   | 4SP8/25P     | 4SP7/25V | 4,0   | 5,5 | 8.0 - 97                       |        | 1574         |
| 4SP8/30   | 4SP8/30P     | 4SP7/30V | 5,5   | 7,5 | 8.0 - 114                      |        | 1829         |
| 4SP8/37   | 4SP8/37P     | 4SP7/37V | 5,5   | 7,5 | 8.0 - 139                      |        | 2046         |

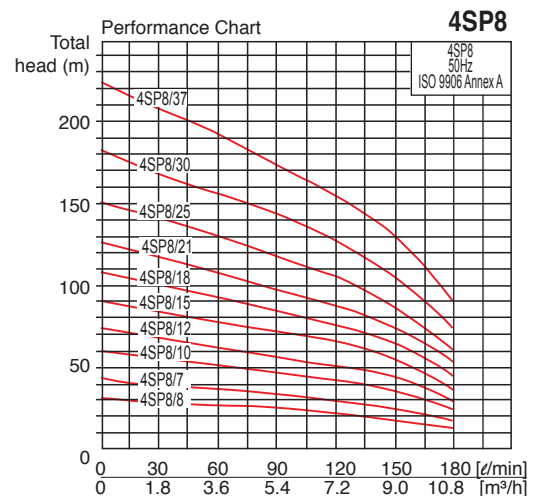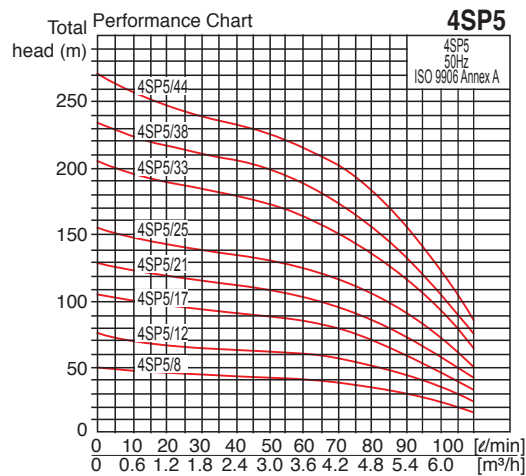

### BRANCH CONTACT DETAILS

|               |              |
|---------------|--------------|
| Johannesburg: | 010 202 3300 |
| Cape Town:    | 021 510 0710 |
| Pinetown:     | 031 700 4215 |
| Germiston:    | 011 418 9600 |
| Riverhorse:   | 031 492 4800 |



<http://www.acdc.co.za>

### NATIONAL CALL CENTRE

|           |              |
|-----------|--------------|
| Sales     | 010 202 3400 |
| Technical | 010 202 3500 |

[www.acdc.co.za](http://www.acdc.co.za)