


# Product SPECIFICATION SHEET



## SASP -5kA, SASP-15kA



Code	SASP-5kA	SASP-15kA
SPD Class	II	II
IP Rating	IP20	IP20
Max Continuous Operating Voltage (Uc)	275VAC	275VAC
Voltage Protection Level (Up)	1.2kV	1.2kV
Nominal Discharge Current (Inom) (In)	5kA (8/20µs)	15kA (8/20µs)
Maximum Discharge Current (Imax)	10kA (8/20µs)	30kA (8/20µs)
Short Circuit Withstand	2.5kA	5kA
Size (mm)	84.8x13x66	84.8x13x67
Operating Temp Range	-40°C to 85°C	-40°C to 85°C
Humidity	35% to 85%RH	35% to 85%RH
Weight	142grm	142grm
Status Indication	Yes	Yes
Operating Method	V clamping MOV	V clamping MOV

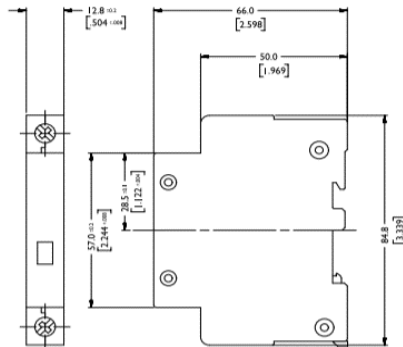

### BRANCH CONTACT DETAILS

Johannesburg 010 202 3300  
 Germiston 011 418 9600  
 Cape Town 021 510 0710  
 Pinetown 031 700 4215  
 Riverhorse 031 492 4800

### NATIONAL CALL CENTRE

Sales 010 202 3400  
 Technical 010 202 3500  
[www.acdc.co.za](http://www.acdc.co.za)